Beauty bed

⚠ ATTENTION! PLEASE READ THESE INSTRUCTIONS BEFORE USING THIS DEVICE PRODUCT MANUAL

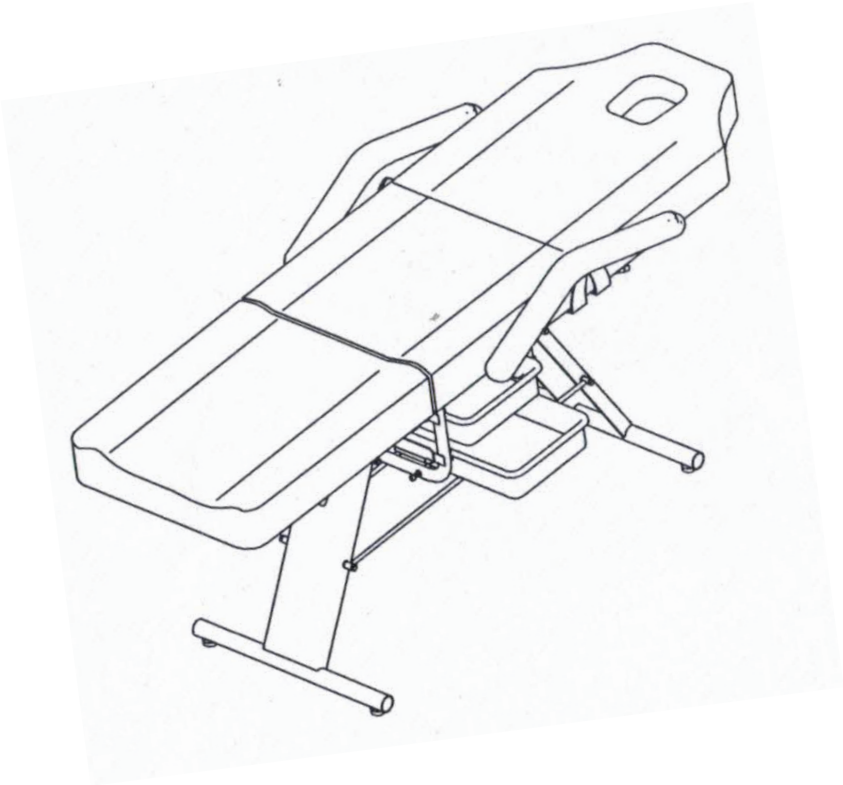

NOTICE:

If your package is missing parts or you are having issues with assembly, please call us directly, Our customer service team will address any questions or concerns you may have. Have this manual open and ready for reference.

⚠

SAFETY

To reduce risk of injury when installing & using the Beauty bed, follow these precautions:

- Read all of these instructions before assembling and using your salon Beauty bed.
- It is helpful to have 2 people assemble and turn the Beauty bed upright after installing.
- Do not over-extend the chair(0~150kg), creating the risk of falls or tipping the Beauty bed, and its occupant over, resulting in injury

OTHER ITEMS YOU WILL NEED (not included)

•Hand Tools:Wrench&Sturdy box

A	 Seat cushion Quantity: 1	G	 Tray racks Quantity: 2
B	 Bedhead Quantity: 1	H	leg support Quantity: 1
C	 Short gear Quantity: 2	I	 trays Quantity: 2
D	 Long gear Quantity: 2	J	handrests Quantity: 2
E	 legs Quantity: 2	K	wrench Quantity: 1
F	leg support Quantity: 2	L	Allen key Quantity: 1

FIRST: All screws have been fixed on the bed, please unscrew them for use

1.remove bolts which pre-fixed onthe seat cushion (A) (B) .

2.Install accessories C and D onto mattresses A and B.

please see diagram besides

1.

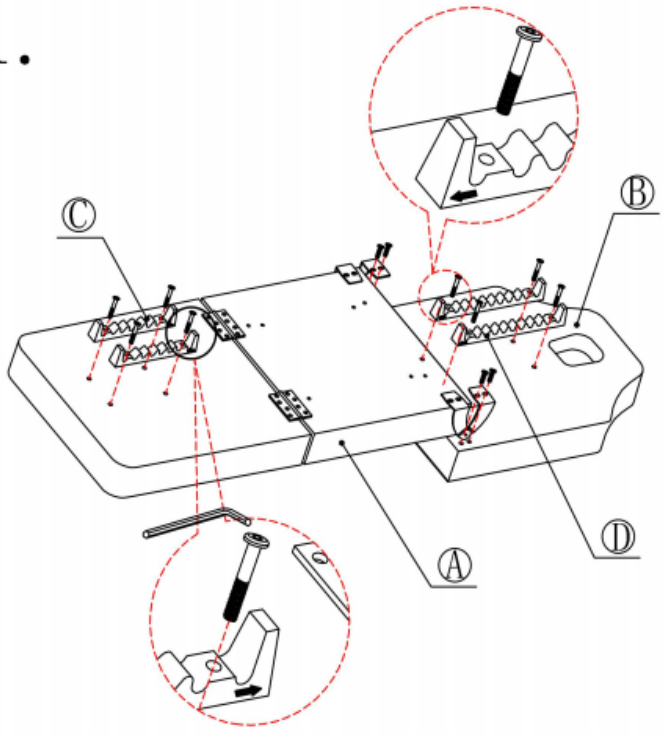

FIRST:Install legs(B)Onto seat cushion(A)

SECOND: INstall legs (E) onto seat cushion (A)(B)

1.remove 4 bolts which pre-fixed onthe seat cushion (A) (B) .
2.install 2 legs (B) to seat cushion (A) (B) with the bolts.

please see diagram besides

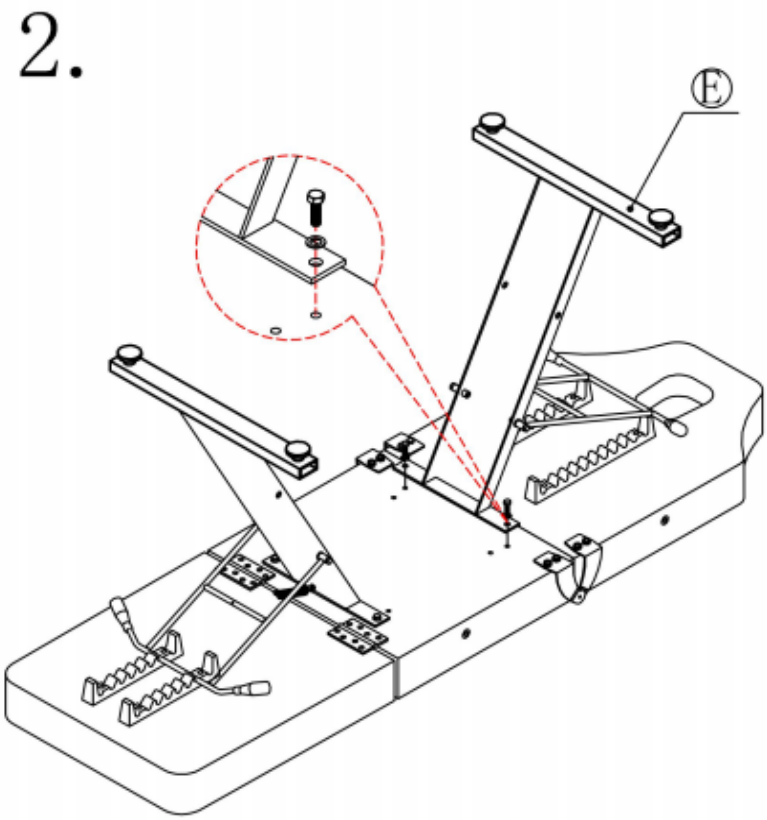

THIRD:Install 2 Legs Support(H)to the middle of legs

1.remove the 4 bolts which pre-fixed in the leg support (F).
2.insert leg support (H)to the middle of legs with the 2 bolts.

please see diagram besides

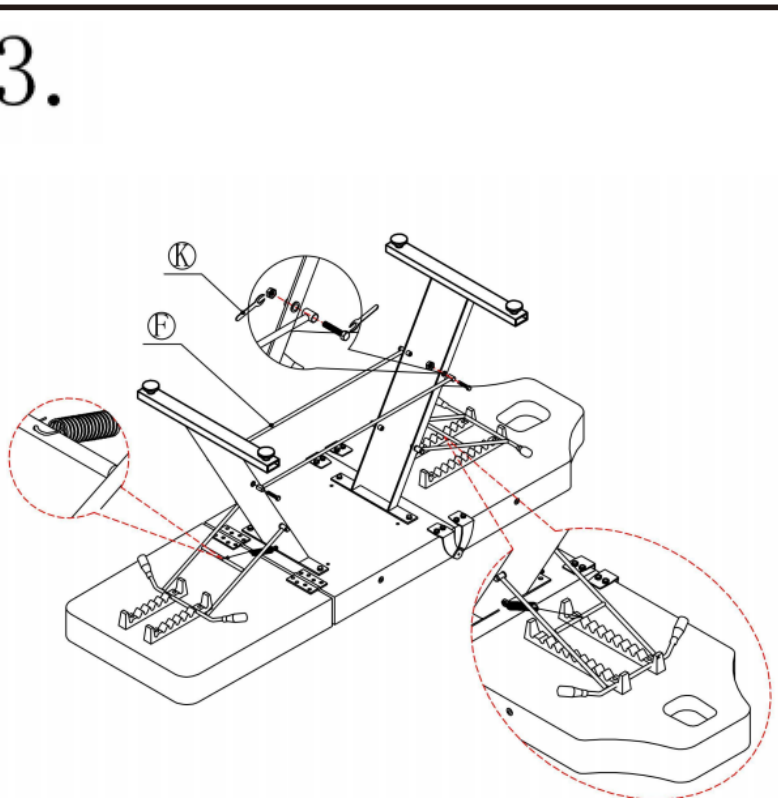

FORTH:Install Tray rack(G) to the seat cushion(A)

1.remove the 4 bolts which pre fixed on the seat cushion(A)
2.Install 2 Tray racks(G) to the seat cushion by the 4 bolts.
3.install leg(H)to Tray racks(G) with the 2 bolts.

please see diagram besides

4.

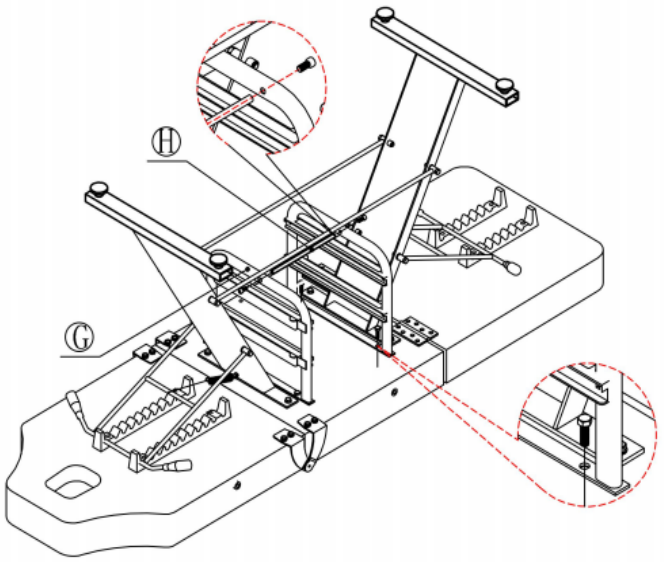

FIve:Install 2 handrests(J) to the seat cushion(A)

1.remove the 4 bolts which pre fixed on the seat cushion(A)
2.Install 2 handrests(J) to the seat cushion by the 4 bolts.
3.Insert 2 trays(I) into the tray rack(G)

please see diagram besides

5.

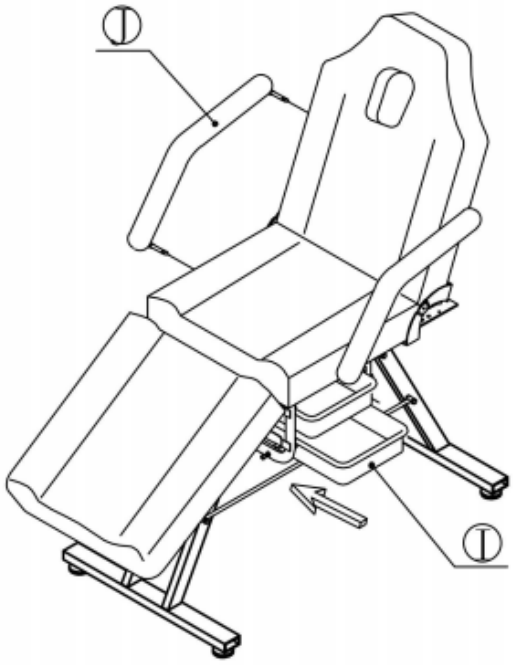
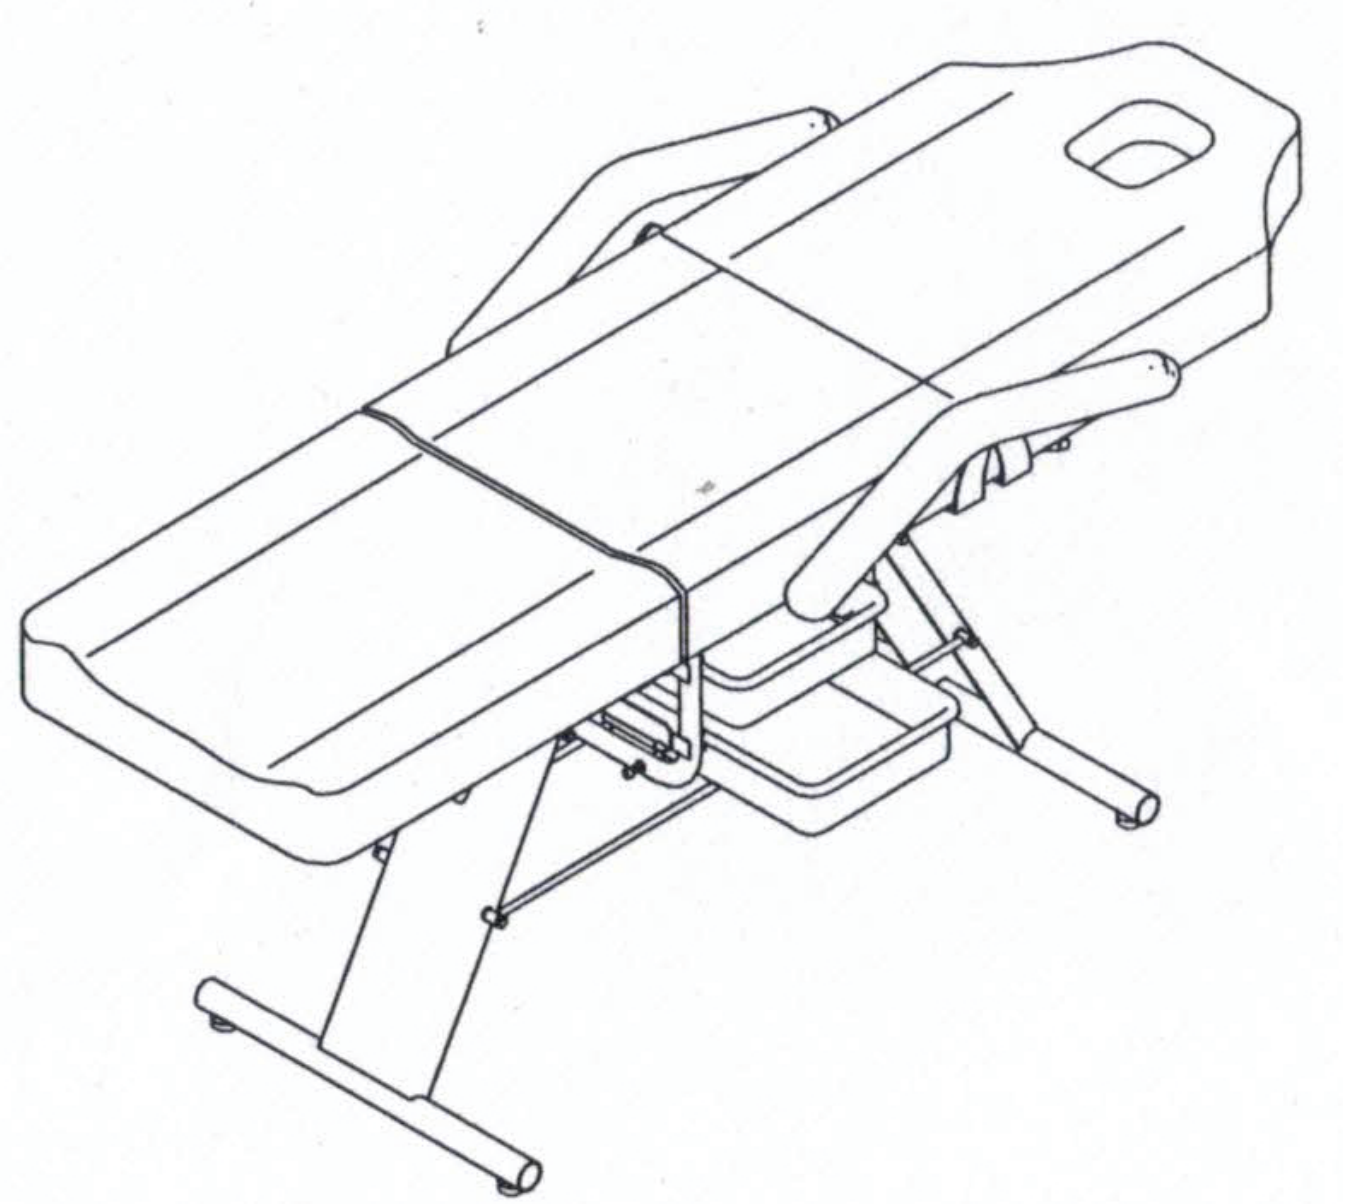
6. FINISH